

Composites USA, Inc. - Fitting Standards

Fitting Style No.: SS-250
Order as Fitting: SS-250

-"D"


Material: Pure Guard SS

- Options:**
- Stainless bolt set
 - Stainless Flange Rings
 - Quick Clamps (Avail. $\leq 18''$)



Project Specifications: Standard Design & Materials, -6" w.c.
 Lengths over 120" may ship in sections for field bolt-up

NO-LOSS STACK CAP

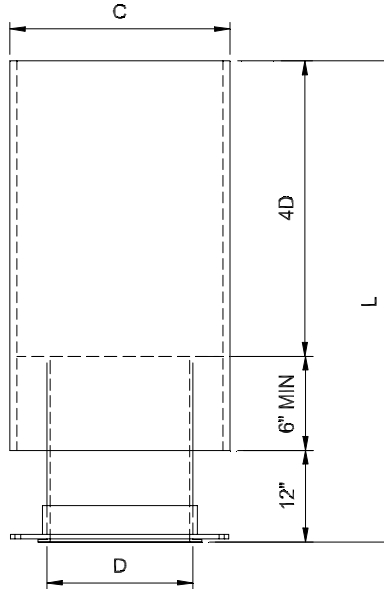

Diameter "D"		"C"		"L"			Diameter "D"		"C"		"L"	
inches	mm	inches	mm	inches	mm		inches	mm	inches	mm	inches	mm
4	102	6	152	34	864		48	1219	50	1270	210	5334
6	152	8	203	42	1067		50	1270	52	1321	218	5537
8	203	10	254	50	1270		52	1321	54	1372	226	5740
10	254	12	305	58	1473		54	1372	56	1422	234	5944
12	305	14	356	66	1676		56	1422	58	1473	242	6147
14	356	16	406	74	1880		58	1473	60	1524	250	6350
16	406	18	457	82	2083		60	1524	62	1575	258	6553
18	457	20	508	90	2286		62	1575	64	1626	266	6756
20	508	22	559	98	2489		64	1626	66	1676	274	6960
22	559	24	610	106	2692		66	1676	68	1727	282	7163
24	610	26	660	114	2896		68	1727	70	1778	290	7366
26	660	28	711	122	3099		72	1829	74	1880	306	7772
28	711	30	762	130	3302		78	1981	80	2032	330	8382
30	762	32	813	138	3505		84	2134	86	2184	354	8992
32	813	34	864	146	3708		90	2286	92	2337	378	9601
34	864	36	914	154	3912		96	2438	98	2489	402	10211
36	914	38	965	162	4115		102	2591	104	2642	426	10820
38	965	40	1016	170	4318		108	2743	110	2794	450	11430
40	1016	42	1067	178	4521		114	2896	116	2946	474	12040
42	1067	44	1118	186	4724		120	3048	122	3099	498	12649
44	1118	46	1168	194	4928		126	3200	128	3251	522	13259
46	1168	48	1219	202	5131		132	3353	134	3404	546	13868

Composites USA

One Peninsula Drive, North East, MD USA 21901
 1-410-287-2700 Fax: 1-410-287-5222 info@compositesusa.com